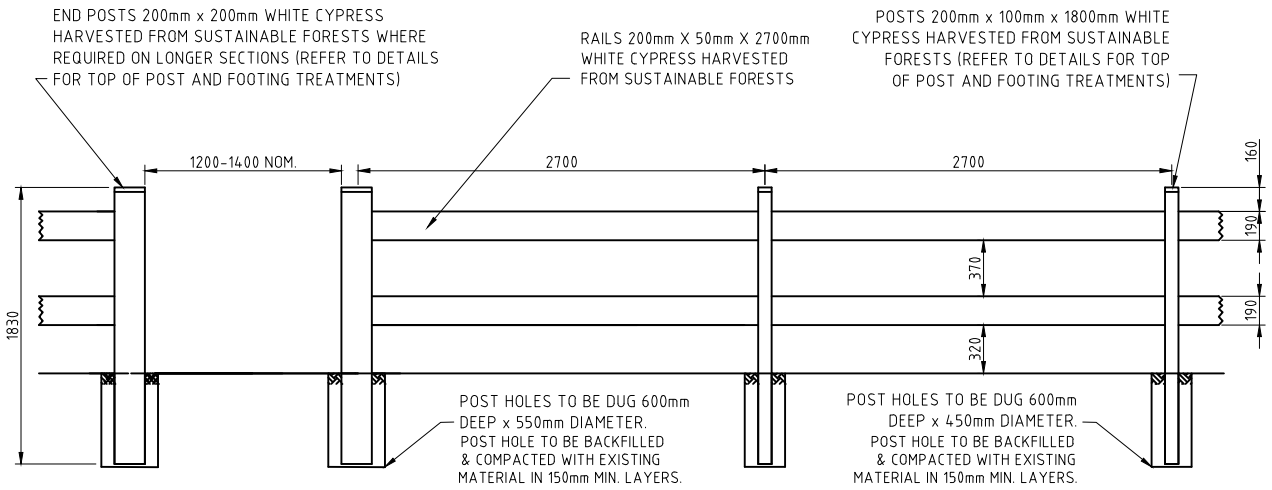

TYPICAL SECTION (DOUBLE TIMBER RAIL)

(N.T.S)

POST HOLE TO BE BACKFILLED & COMPACTED WITH EXISTING MATERIAL IN 150mm MIN. LAYERS

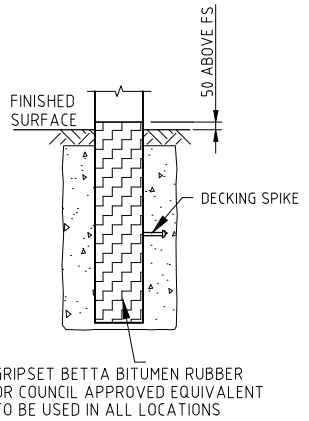

CONCRETE FOOTING

25MPa STRENGTH CONCRETE
FOR USE IN HIGH VANDALISM AREAS



TOP OF POST DETAIL (200x200 END POST) (TOP VIEW)

(N.T.S)

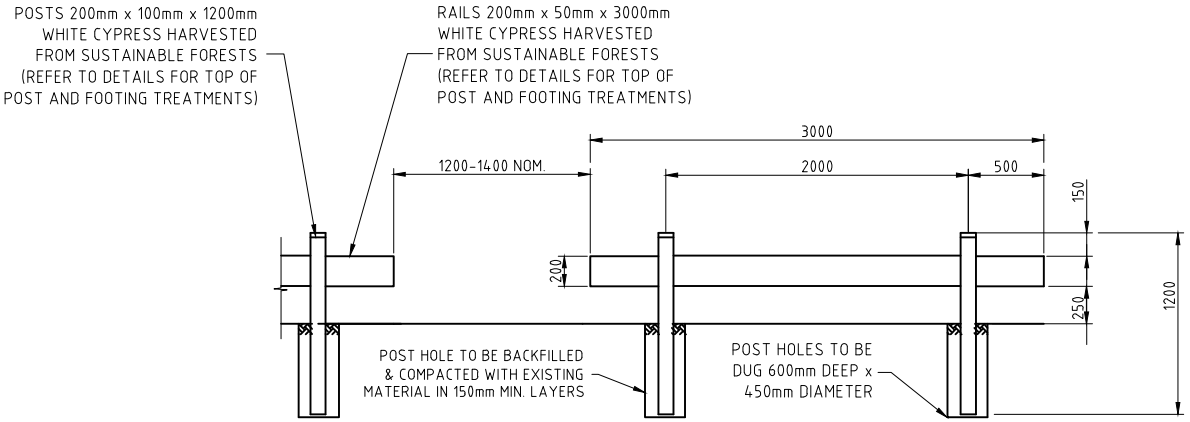

TYPICAL SECTION (SINGLE TIMBER RAIL)

(N.T.S)



TOP OF POST DETAIL (200x100 STANDARD POST) (TOP VIEW)

(N.T.S)



TOP OF POST DETAIL (SIDE VIEW)

(N.T.S)

VER	APPD.	DATE	AMENDMENT
2		AUG 2017	REVISED AND REISSUED
1		OCT 2008	ENDPOST SIZE INCREASED
0		APR 2008	REVISED AND REISSUED

REFERENCES:

APPROVED:
V Shelton
Manager Engineering Services
Date: August 2017

CITY OF GREATER GEELONG
DESIGN UNIT
ENGINEERING SERVICES

STANDARD DETAIL

TIMBER POST AND RAIL FENCE

DRAWING No: CGG709

AMENDMENT: 2